

PRODUCT SPECIFICATION

Model No. : CSDV-S12053X-01

Description:	
■ Product Type	: Touch SMD Display
■ Digit Height	: 8.0*8.0mm
■ Emitting Color	: Pure Green; Yellow; Amber; Orange; Red; Deep Red
■ Feature	: White Face With Touch PCB White Segment



CUSTOMER APPROVED SIGNATURES	APPROVED BY	CHECKED BY	PREPARED BY

OPTO PLUS TECHNOLOGIES CO.,LTD

Address: No.696, Yangming North Rd,
ShaoXing City, ZheJiang Province, P.R.China.

Tel : 86-575-88623888

Fax: 86-575-88623112

Model No.: CSDV-S12053X-01

■ Features -

1. SMD type
2. Qualified according to JEDEC moisture sensitivity Level 2a
3. RoHS compliant.
4. Low power consumption.
5. Easy mounting on P.C. board

■ Device Selection Guide -


Model No.	Chip Material	Color		Description
		Emitter	Segment Resin	
CSDV-S120532	InGaN	Pure Green	White	/
CSDV-S12053T	AlGaInP	Yellow		
CSDV-S12053A		Amber		
CSDV-S12053V		Orange		
CSDV-S12053L		Red		
CSDV-S12053U		Deep Red		

■ LED Numeric/Alphanumeric Display

CSDV-S12053X-01

Model No. code Resin color code
Dice color Code Silk Screen ink color code

■ Mechanical Dimensions -

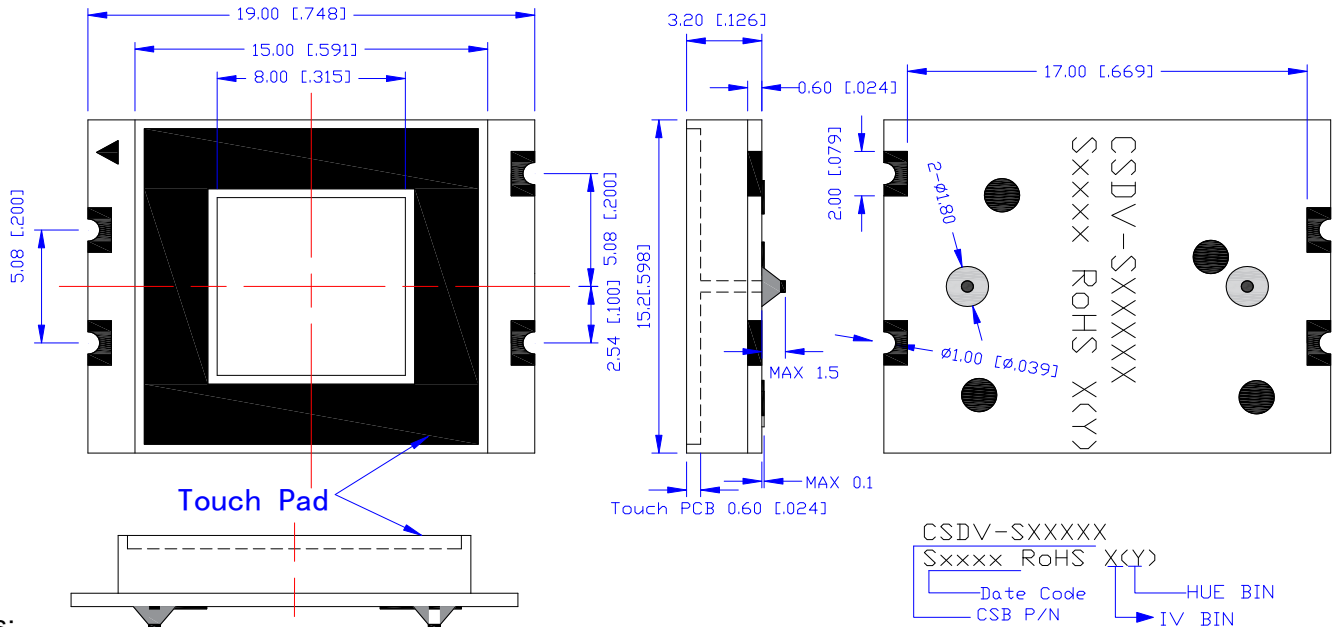


Notes:


1. Dimension in millimeter [inch], tolerance is ± 0.25 [0.010], unless otherwise noted
2. Bending $\leq \text{Length} \times 1\%$

Model No.: CSDV-S12053X-01

■ All Light On Segments Feature & Pad Position

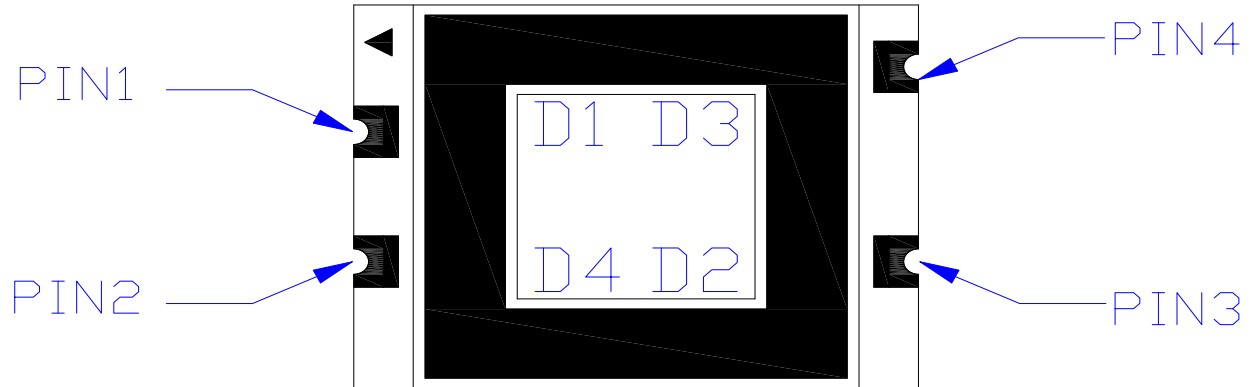

■ Internal Circuit Diagrams -

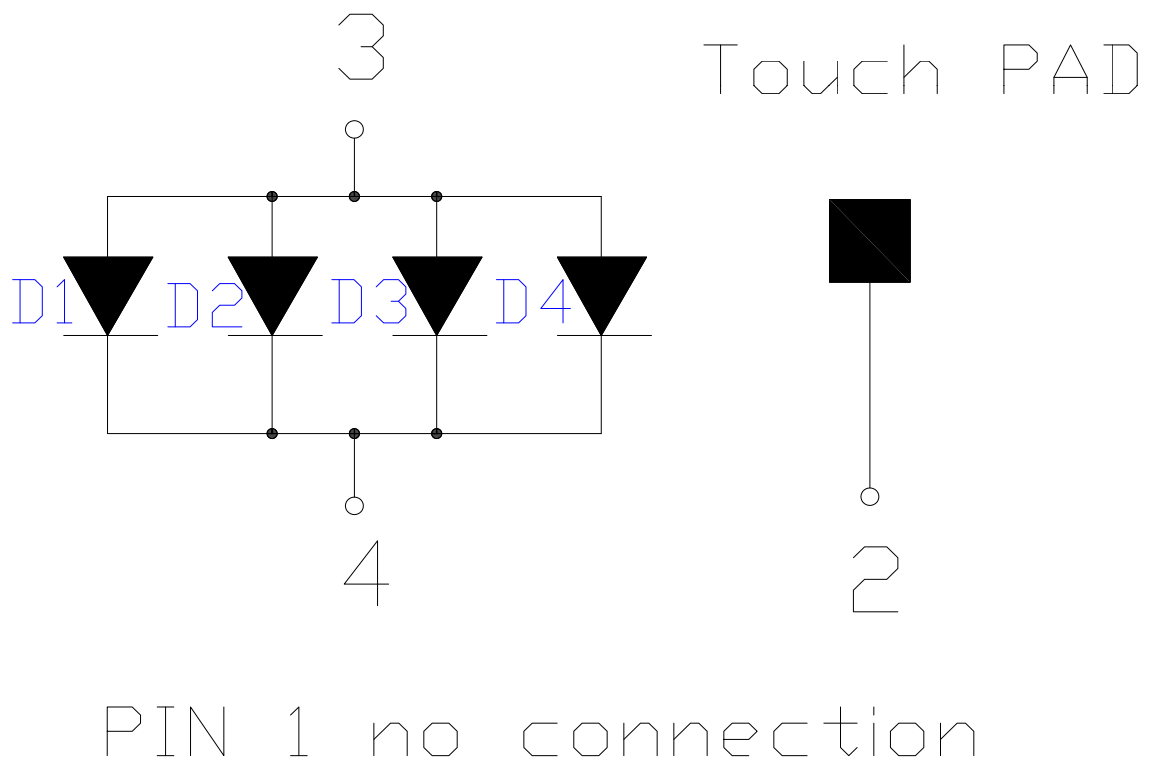

Model No.: CSDV-S12053X-01

■ Absolute Maximum Rating -

Parameter	Symbol	Rating		Unit
		2	M/T/A/V/L/U	
Power Dissipation Per Dice	P_d	114	70	mW
Continuous Forward Current Per Dice	I_f	30	25	mA
Peak Current Per Dice(duty cycle 1/10,1KHz)	I_{fp}	100	90	mA
Derating Liner from 25°C Per Dice	$\Delta I_f / \Delta T$	0.4	0.33	mA / °C
Reverse Voltage Per Dice	V_r	5	5	V
Electrostatic discharge(HBM)	ESD	1000	/	V
Operating Temp.	T_{opr}	-40 ~ +105		°C
Storage Temp.	T_{stg}	-40 ~ +105		°C
Hand Soldering Temp.	T_{sol}	350		°C

■ Electro-optical Characteristics -

Parameter	Symbol	Chip	Min.	Typ.	Max.	Unit	Condition
Forward Voltage Per Dice	V_f	2	-	3.2	3.8	V	$I_f=20mA$
		T/A/V/L/U	-	2	2.8		
Luminous Intensity Per Segment	I_v	2	-	650	-	mcd	$I_f=20mA$
		T	-	135	-		
		A	-	155	-		
		V	-	105	-		
		L	-	65	-		
		U	-	40	-		
Peak Emission Wavelength/Dominant Wavelength	λ_p/λ_d	2	-	*525	-	nm	$I_f=20mA$
		T	-	592/590	-		
		A	-	612/605	-		
		V	-	632/625	-		
		L	-	644/630	-		
		U	-	660/645	-		
Spectrum Radiation Bandwidth	$\Delta \lambda$	2	-	30	-	nm	$I_f=20mA$
		T/A/V/L/U	-	20	-		
Reverse Current	I_r	I_v	-	-	100	μA	$V_r=5V$
Luminous Intensity Matching Ratio	I_v-m	I_v	-	-	2:1	-	$I_f=20mA$

Model No.: CSDV-S12053X-01

Electrical / Optical Characteristics Curves -Per Dice

(Ta = 25°C Unless Otherwise Noted)

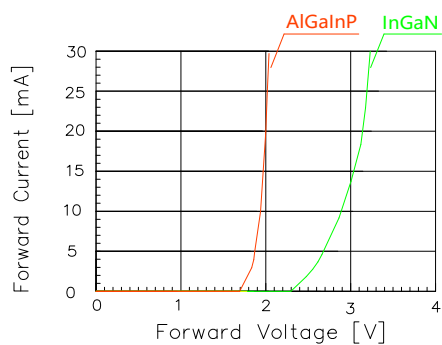


Fig 1. Forward Current vs. Forward Voltage

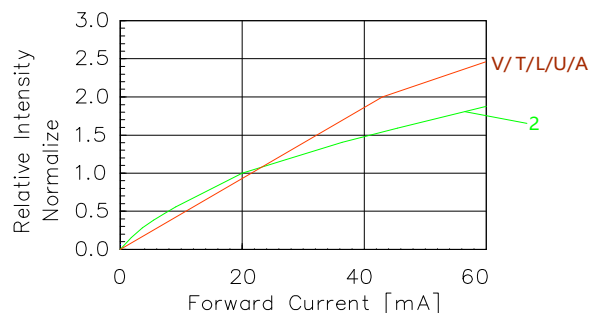


Fig 2. Relative Intensity vs. Forward Current

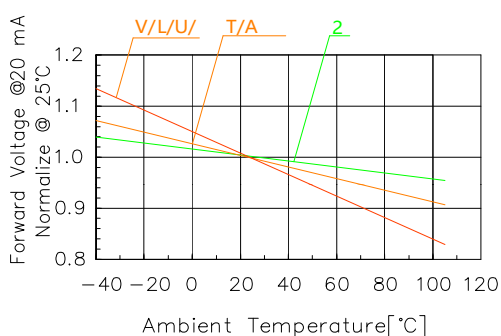


Fig 3. Forward Voltage vs. Temperature

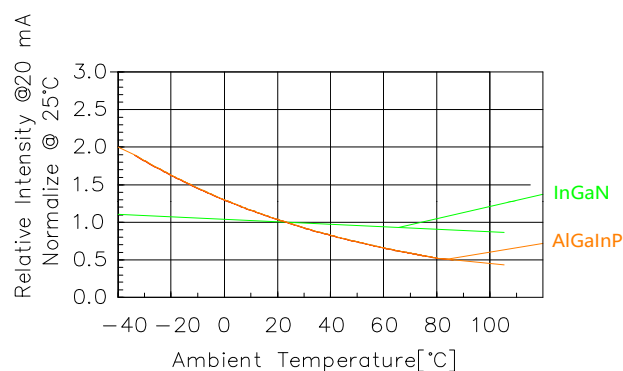


Fig 4. Relative Intensity vs. Temperature

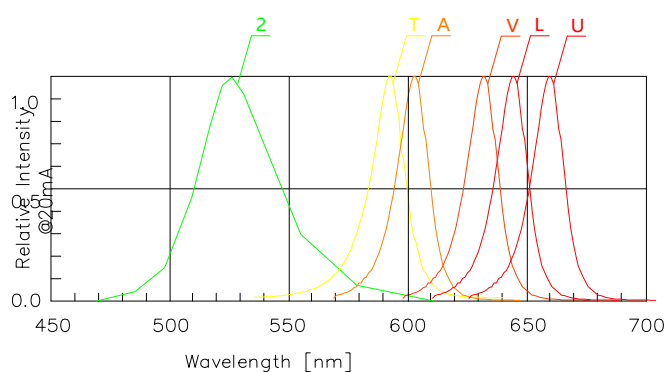


Fig 5. Relative Intensity vs. Wavelength

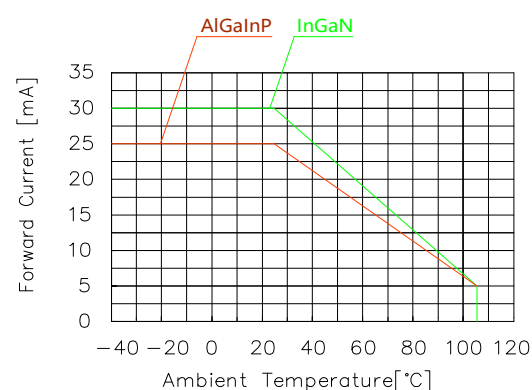



Fig 6. Forward current vs. Temperature

Model No.: CSDV-S12053X-01

■ Soldering Characteristics

1. IR-Reflow Soldering Profile :

Area	Title	Symbol	Min	Max	Unit
(1)Preheat	Ramp-up rate	Vp	1	5	℃/sec
	temperature	Tp	150	—	℃
	time	tp	—	—	sec
(2)Equilibrium	Ramp-up rate	Ve	—	—	℃/sec
	temperature	Te	150	200	℃
	Time	te	60	120	sec
(3)Reflow	Ramp-up rate	Vr	1	5	℃/sec
	temperature	Tr	220	—	℃
	Time	tr	—	60	sec
	Peak temperature	Trp	—	260	℃
	Peak time	trp	—	10	sec
(4)Cooling	Ramp-down rate	Vc	3	6	℃/sec

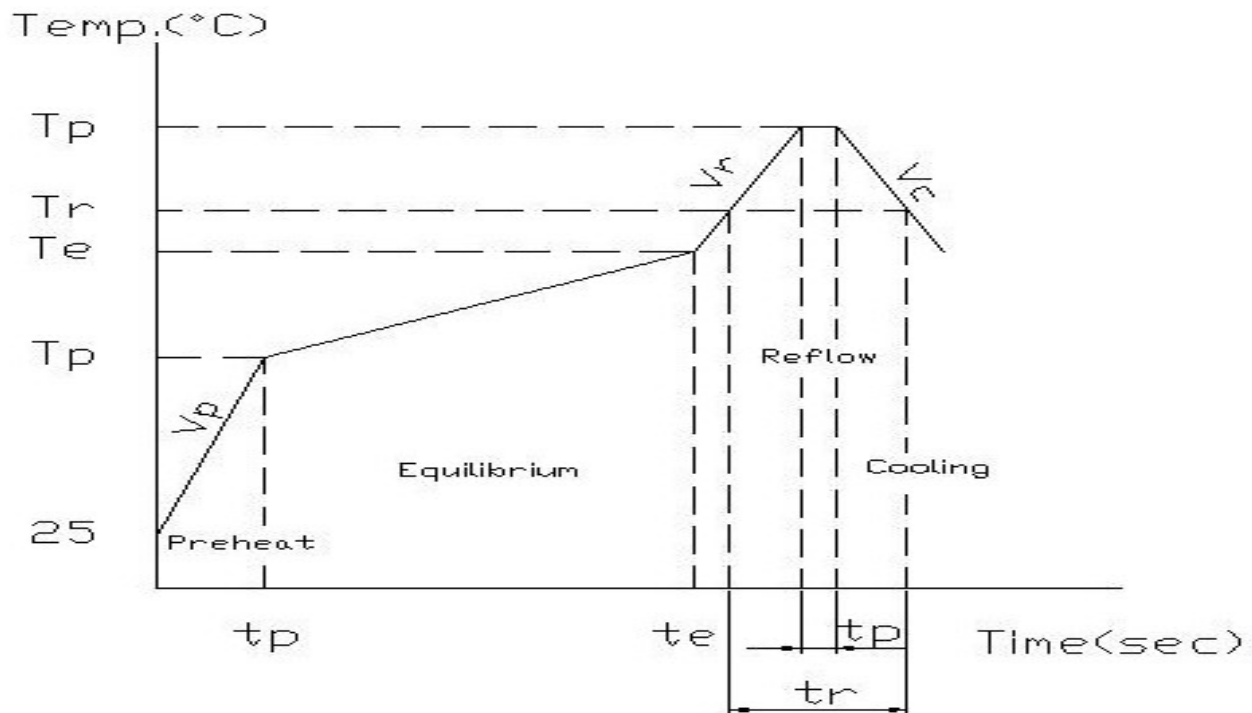

Model No.: CSDV-S12053X-01

2.Hand Soldering (Iron Condition)

Soldering Iron:30W Max


Temperature 350°C Max

Soldering Time:3 Seconds Max(One Time)


Distance:1.6mm min(From seating plane)

■ Soldering Pad Size

Top Mount

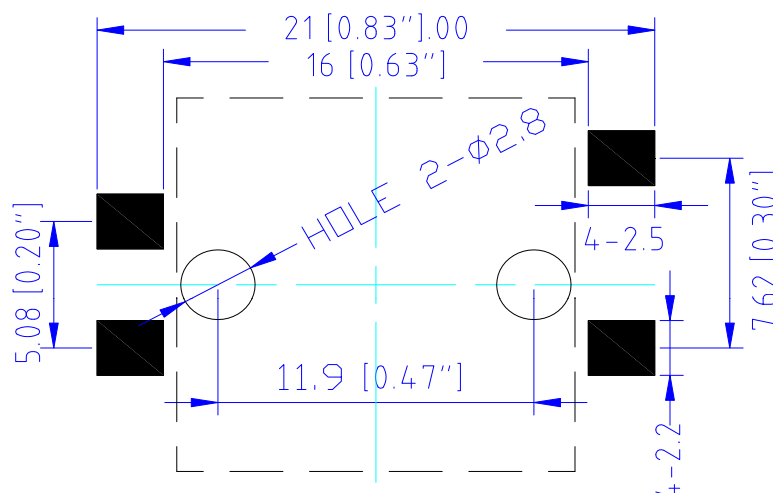


Reverse Mount

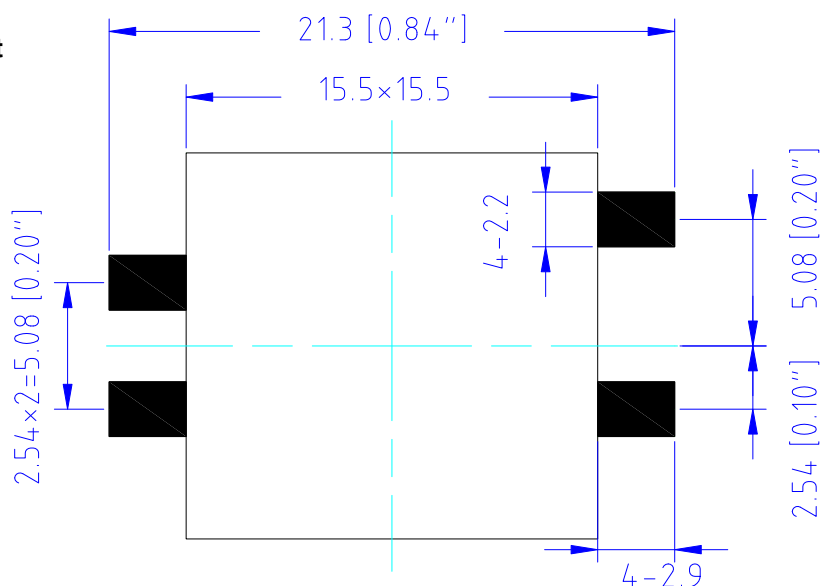


Model No.: CSDV-S12053X-01

■ Reel Dimensions

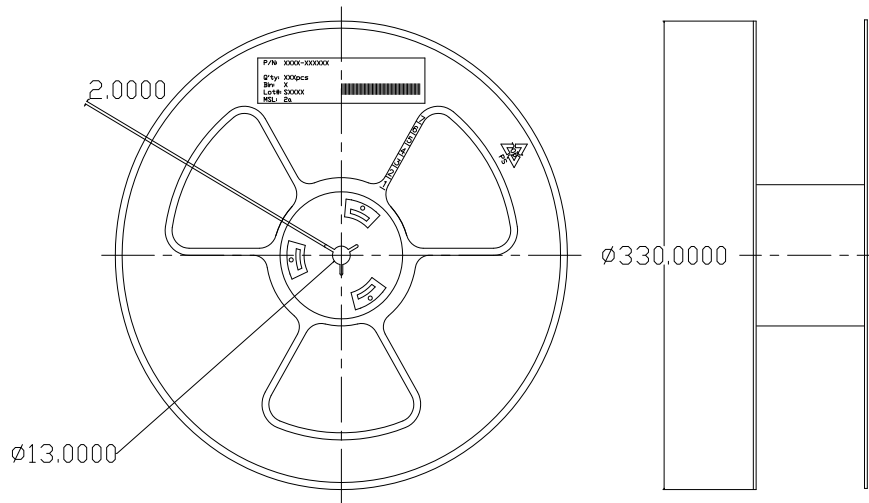

■ Packing & Label Specifications

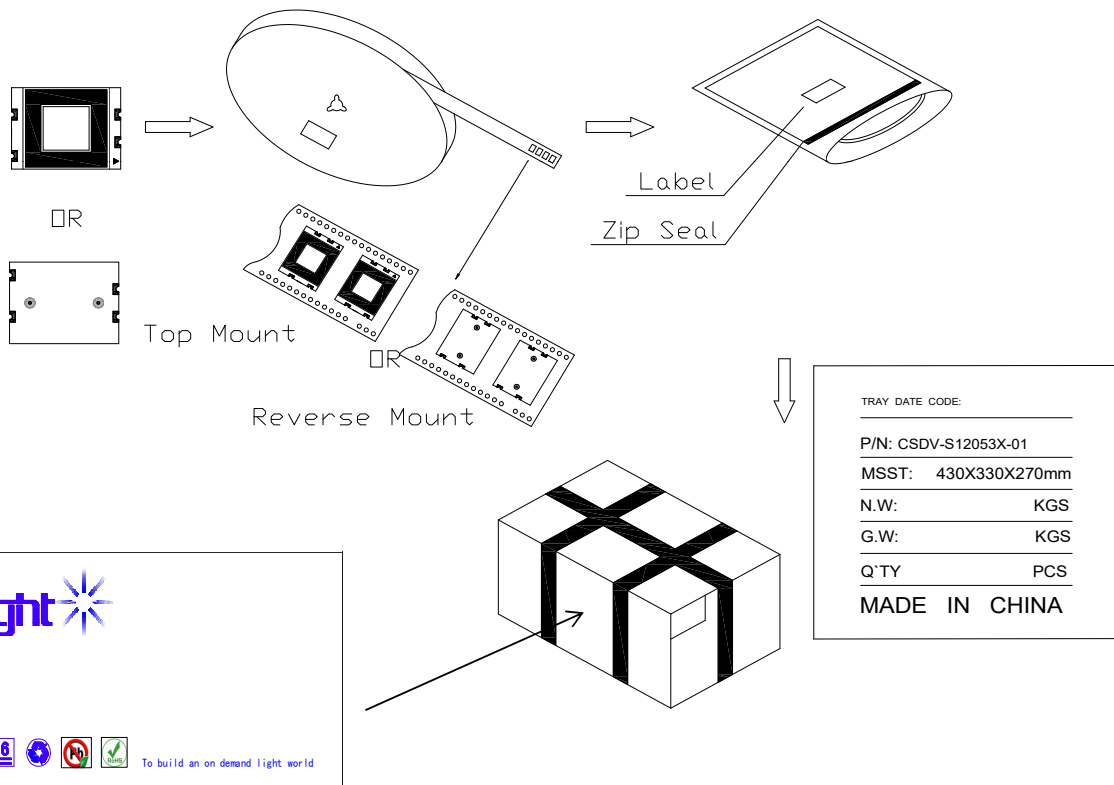

Package Name	Size	Unit	Amount	Unit	Amount	Unit	Note
Reel	Φ 330	mm	1	Reel	750	Pcs	/
Bag	L450*W430	mm	1	Reel	750	Pcs	/
Outer Box	L430*W330*H270	mm	5	Bag	3750	Pcs	/